

LC201A 传感压力表

LC201A Sensored Pressure gauge

Description

LC201A 是一款线性输出传感表，输出是基于额外补偿的机械系统。

对黄铜、磷铜或铍铜、空气、石油、天然气和水设施无腐蚀性。

LC201A is linear volt output, the output is based on a mechanical system with extra compensation.

Non-corrosive to brass, phosphor bronze, or beryllium copper, air, oil, gas and water services.




LC201A

Material Feature


指针 Pointer:	PA66+30%GF	防护等级 Protection:	IP65
机芯 Movement:	黄铜 Brass	外壳 Case:	钢 Mild Steel
表径 Diameter:	63mm	表圈 Ring:	钢 Mild Steel
标牌 Dial:	塑料 Plastic	接头 Connection:	黄铜 Brass NPT/BSP/BSPT/Metric
表面 Window:	聚碳酸酯 Polycarbonate	弹簧管 Bourdon Tube:	磷青铜 Phosphorus Bronze
填充液 Filling Liquid:	不填充 No Filled	压力范围 Pres. Range:	VAC~9PSI~15000PSI
精度 Accuracy:	机械信号 Mechanical: 1.6%/1.0%* 电信号 Electrical: 1.0%/0.6%*		
*可按要求提供 * Available under request			

Dimensions

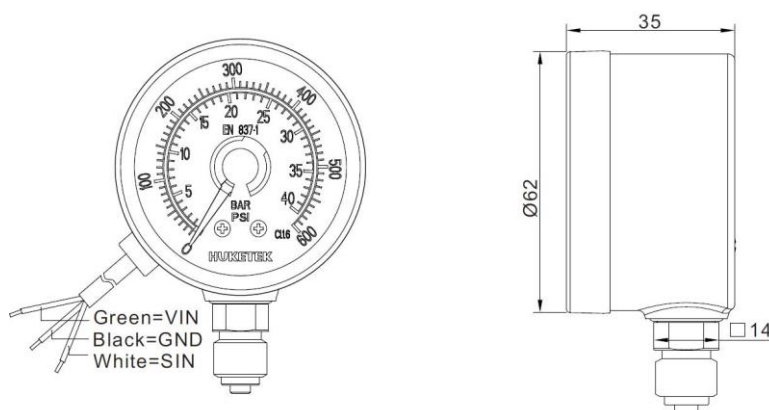

Output types

信号类型 (可定制) Signal Type (Can be customized)		
信号 Signal	输入 Input	输出 Output
F4 (默认 Default)	5v	0bar/0.50v~F.S./4.50v
F5	5v	0bar/0.25v~F.S./4.15v
F6	5v	0bar/0.25v~F.S./4.75v
F7	5v	0bar/0.50v~F.S./4.41v
T4	9~24v	0bar/0.50v~F.S./4.50v
T5	9~24v	0bar/0.25v~F.S./4.15v
T6	9~24v	0bar/0.25v~F.S./4.75v
T7	9~24v	0bar/0.50v~F.S./4.41v

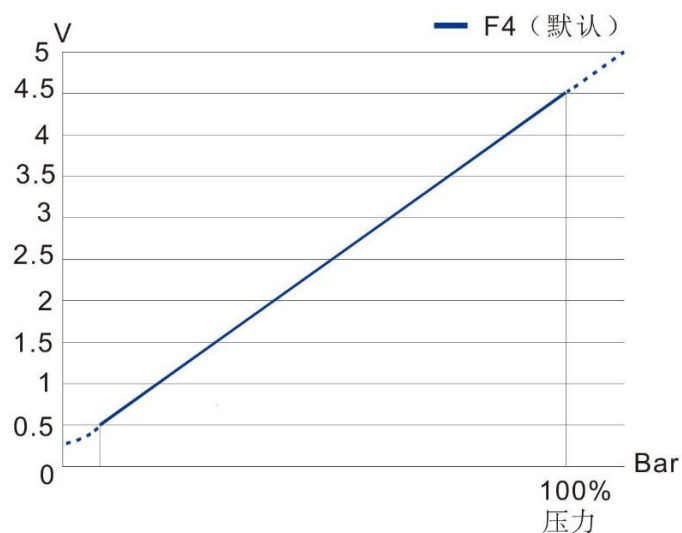

Comparison Chart

